ASTE ELICOIDALI con attacco esagonale
AUGERS WITH HEXAGONAL COUPLING

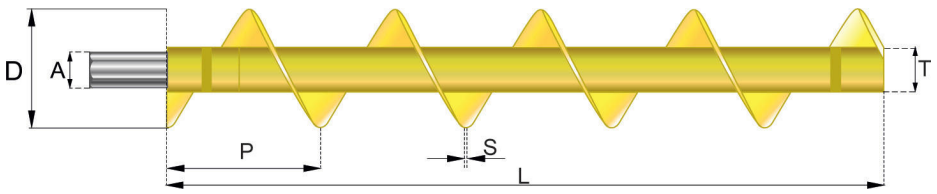

D	P	S	T	A	L
Ø ESTERNO mm *OUTER Ø mm*	PASSO mm *PITCH mm*	SPESSORE mm *THICKNESS mm*	Ø TUBO mm *TUBE Ø mm*	ATTACCO *COUPLING*	LUNGHEZZA *LENGTH*
100	100	10	63 - 76	CH 41 - CH 50	1.000 - 1.500 - 2.000 - 3.000
120	120	10	63 - 76	CH 41 - CH 50	1.000 - 1.500 - 2.000 - 3.000
130	130	10	63 - 76	CH 41 - CH 50	1.000 - 1.500 - 2.000 - 3.000
140	140	10	63 - 76	CH 41 - CH 50	1.000 - 1.500 - 2.000 - 3.000
150	150	10	63 - 76 - 89	CH 41 - CH 50 - CH 60	1.000 - 1.500 - 2.000 - 3.000
160	160	10	76 - 89	CH 50 - CH 60	1.000 - 1.500 - 2.000 - 3.000
170	170	10	76 - 89	CH 50 - CH 60	1.000 - 1.500 - 2.000 - 3.000
180	180	10	76 - 89	CH 50 - CH 60	1.000 - 1.500 - 2.000 - 3.000
200	200	10	76 - 89 - 114	CH 50 - CH 60 - CH 75	1.000 - 1.500 - 2.000 - 3.000
220	220	10	89 - 114	CH 60 - CH 75	1.000 - 1.500 - 2.000 - 3.000
250	250	10	89 - 114	CH 60 - CH 75	1.000 - 1.500 - 2.000 - 3.000
280	280	10	89 - 114	CH 60 - CH 75	1.000 - 1.500 - 2.000 - 3.000
300	300	10	89 - 114	CH 60 - CH 75	1.000 - 1.500 - 2.000 - 3.000
350	350	12	114	CH 75	1.000 - 1.500 - 2.000 - 3.000
400	400	12	114	CH 75	1.000 - 1.500 - 2.000 - 3.000

Aste realizzate con tubo in acciaio S355JOH e con raccordi esagonali ciechi in acciaio 42NCD4 bonificato. Tutti i raccordi vengono trattati con un processo di nitrurazione antigrippaggio. Spirale realizzata con acciaio S355JOH. Per lavori particolarmente gravosi può essere realizzata con acciaio T1A ad alta resistenza.

Augers made of S355JOH steel and with hexagonal plain connections of 42NCD4 hardened steel. All connections are treated with an anti-seize nitriding process. The spiral is made of S355JOH steel. It can be made of high resistance T1A steel to perform very heavy works.

PUNTE PER ASTE ELICOIDALI CON ATTACCO ESAGONALE
BITS FOR AUGERS WITH HEXAGONAL COUPLING

PUNTA PER ROCCIA
ROCK BIT

PUNTA PER ARGILLA
CLAY BIT

Diametri, lunghezze ed attacchi diversi sono disponibili su richiesta.
Diameters, lengths and connections are available on request.