ASTE ELICOIDALI con attacco esagonale sistema CFA

AUGERS WITH HEXAGONAL COUPLING CFA SYSTEM

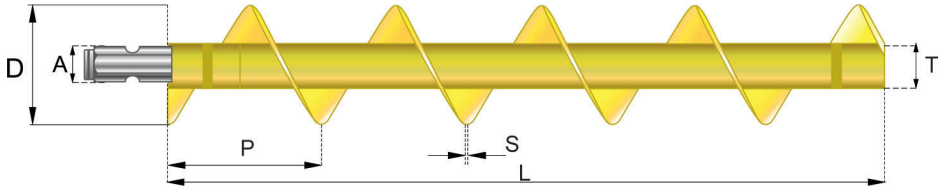

D	P	S	T	A	L
Ø ESTERNO mm *OUTER Ø mm*	PASSO mm *PITCH mm*	SPESSORE mm *THICKNESS mm*	Ø TUBO mm *TUBE Ø mm*	ATTACCO *COUPLING*	LUNGHEZZA *LENGTH*
130	130	10	89	CFA 65	1.000 - 1.500 - 2.000 - 3.000
140	140	10	89	CFA 65	1.000 - 1.500 - 2.000 - 3.000
150	150	10	89	CFA 65	1.000 - 1.500 - 2.000 - 3.000
160	160	10	89	CFA 65	1.000 - 1.500 - 2.000 - 3.000
170	170	10	89	CFA 65	1.000 - 1.500 - 2.000 - 3.000
180	180	10	101	CFA 65	1.000 - 1.500 - 2.000 - 3.000
200	200	10	101 - 114	CFA 65 - CFA 80	1.000 - 1.500 - 2.000 - 3.000
220	220	10	101 - 114	CFA 65 - CFA 80	1.000 - 1.500 - 2.000 - 3.000
250	250	10	101 - 114	CFA 65 - CFA 80	1.000 - 1.500 - 2.000 - 3.000
280	280	10	101 - 114	CFA 65 - CFA 80	1.000 - 1.500 - 2.000 - 3.000
300	300	10	101 - 114	CFA 65 - CFA 80	1.000 - 1.500 - 2.000 - 3.000
350	350	12	114	CFA 80	1.000 - 1.500 - 2.000 - 3.000
400	400	12	114	CFA 80	1.000 - 1.500 - 2.000 - 3.000
350	350	12	114	3"1/2 A.R.	1.000 - 1.500 - 2.000 - 3.000
400	400	12	114	3"1/2 A.R.	1.000 - 1.500 - 2.000 - 3.000

Aste realizzate con tubo in acciaio S355JOH e con raccordi esagonali forati in acciaio 42NCD4 bonificato. Tutti i raccordi vengono trattati con un processo di nitrurazione antigrippaggio. Spirale realizzata con acciaio S355JOH. Per lavori particolarmente gravosi può essere realizzata con acciaio T1A ad alta resistenza.

Augers made of S355JOH steel and with hexagonal holed connections of 42NCD4 hardened steel. All connections are treated with an anti-seize nitriding process. The spiral is made of S355JOH steel. It can be made of high resistance T1A steel to perform very heavy works.

PUNTE PER ASTE ELICOIDALI CON ATTACCO ESAGONALE SISTEMA CFA

BITS FOR AUGERS WITH HEXAGONAL COUPLING CFA SYSTEM

PUNTA PER ROCCIA
ROCK BIT

PUNTA PER ARGILLA
CLAY BIT

Diametri, lunghezze ed attacchi diversi sono disponibili su richiesta.
Diameters, lengths and connections are available on request.